


Range : Timed flow single tap for shower

Ref : 38022 - PRESTO P 50 single tap

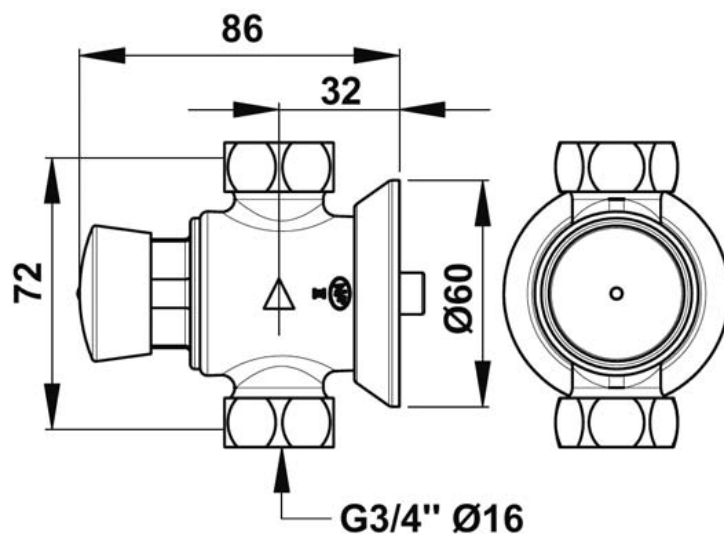

> Working pressure :

- 1 to 5 bar

> Flow :

- 6 l/min at 3 bar with integrated flow limiter
- Flow rate control through a ring nut
- Anti-water-hammering design

> Flow time :

- 30 seconds (± 5 sec.)

> Hydraulic supply :

- M G 3/4" (20x27) - Cold or premixed water

> Thermal resistance :

- Resistant to a temperature of 75°C for 30 minute thermal shock

> Security :

- Non-turnable push button
- Non-removable, wear-proof red marker

> Delivered with :

- 1 Flat gasket
- 1 Filter gasket
- 2 Union nuts 3/4" (20x27) for 14x16 mm tube
- Instruction manual

> Standards & approvals :

- Acoustic class II
- Brass body in accordance with EN 1982, EN 12164, EN 12165
- Molded chrome-plated body in accordance with EN 12540
- 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227

This document is not contractual. We reserve the right to modify the characteristics of our products without notice in advance. All our brands and models are registered trade marks.

