

KWC

Swiss Water Experience

KWC
ONO







A graceful
little
multitasker



KWC ONO brings both practicality and elegance to the bathroom. With its streamlined look and cylindrical form, its striking lever and its clever functions, it sends out a clear message: the people who live here have class. This versatile, multiple-award-winning product line offers a uniquely broad range and will appeal to discerning users who appreciate timeless yet intelligent bathroom design.

Direct and precise

The KWC ONO operating lever is made of the kind of unbreakable, corrosion-resistant stainless steel you would normally find in medical technology. This means that you can count on perfect precision when you use it.

KWC ONO lightpin

KWC ONO lightpin reflects the water temperature at any given time in LED-illuminated colour. The sensor in the cartridge activates the pin in response to touch and switches it off automatically after 60 seconds or if the water temperature falls below 38°C. If the water temperature exceeds 45°C, the light flashes red. The lever operates the cartridge directly, guaranteeing maximum precision.



Grace in every movement



Dazzling diversity in bathtub details

As a bathtub feature, KWC ONO combines comfort, safety and aesthetic appeal in a single bathroom faucet. Whether you opt for a classic lever mixer or a thermostat, a surface-mounted or concealed solution, the versatile variety offered by KWC ONO gives you plenty of scope for planning your bathroom design.

Getting to the crux of your requirements

The bathtub spout can be swivelled 60°, so you can change the direction of the water spray in no time at all. This practical detail is one of KWC ONO's finest features – although it may not be obvious at first glance, as it is discreetly concealed inside the cylindrical body.






Talent at every turn




With an unparalleled range of faucets and countless technological innovations, this talented all-rounder offers intelligent solutions that can make any bathroom wish come true.

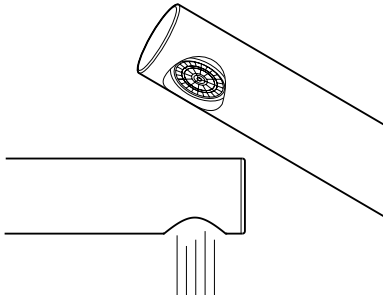


Neoperl® Caché®

The Neoperl® Caché spray is integrated into the spout and adds an elegant finishing touch to the overall look. The lever mixer for the bidet has a ball-jointed filter, allowing you to direct the jet of water anywhere you want. The bathtub spout filter is concealed from view inside the cylindrical body.

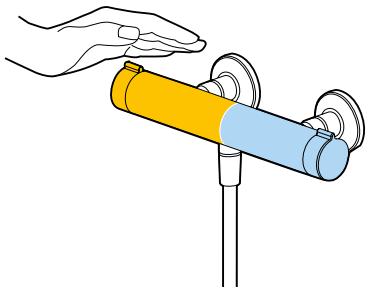


touchcontrol (on thermostats only)

This water guidance system with its 'double skin' principle ensures that users are never burned by their KWC faucet. The insulated hot water supply keeps the body of the faucet warm without letting it get too hot.

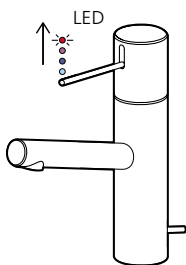


colorflow

This LED display provides you with an accurate and continuously variable indication of the current water temperature. colorflow highlights the tip of the lever on your faucet in a particularly effective way.

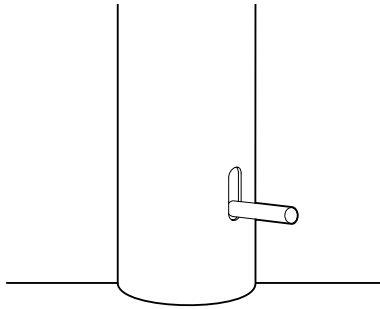


Pop-up lever

The lever mixer is available with or without a pop-up lever, which blends discreetly into the background of the overall design.

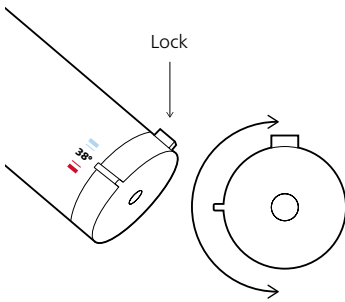


hotcontrol (on thermostats only)

Faucets with hotcontrol technology only supply water at temperatures above 38° C if the safety button on the temperature controller has been pressed deliberately. If the cold water supply fails, the hot water flow is automatically stopped immediately.

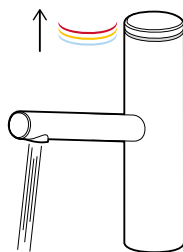


tipcontrol

On low-contact faucets with DDSA® sensor technology, you can set the water temperature to suit your personal preference. One tap means cold (blue), two taps means warm (orange) and three means hot (red). Pressing the faucet for five seconds will activate the cleaning function (green).

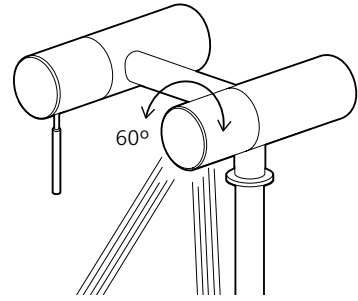

Bathtub spout

The bathtub spout, which is almost completely concealed inside the cylindrical body, can be rotated 60°, so you can control the direction of the water spray in a single turn.

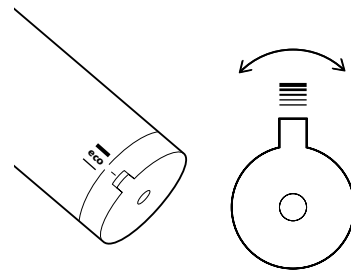

smartcontrol (on thermostats only)

smartcontrol keeps an eye on water consumption. Tangible resistance in the turning handle limits the amount of outflowing water. To switch off the economy mode, twist the handle back past the catch point.

Shower head with ball joint

The KWC PIATTO R shower head features a practical ball joint. To avoid limescale build-up and dirt deposits, simply tilt the shower head. This allows any residual water to drain off and prevents dripping.

Swivelling shower arm

The swivelling shower arm can easily be swivelled to the left or to the right, giving you all-round flexibility in the shower, even in tight spaces.

Water-bearing sliding wall bar


The water-bearing sliding wall bar can be shortened as required. The pipe-in-pipe system ensures that it never gets too hot, which prevents scalding.


Spray holder with 3D function

The hand shower can be positioned at whatever angle you like and is guaranteed to stay firmly in place, not least thanks to the lockable elevation adjustment system.

Rotatable cone

KWC shower hoses come with a rotatable cone as standard. This prevents the hose from becoming twisted, even if it is moved around a lot.

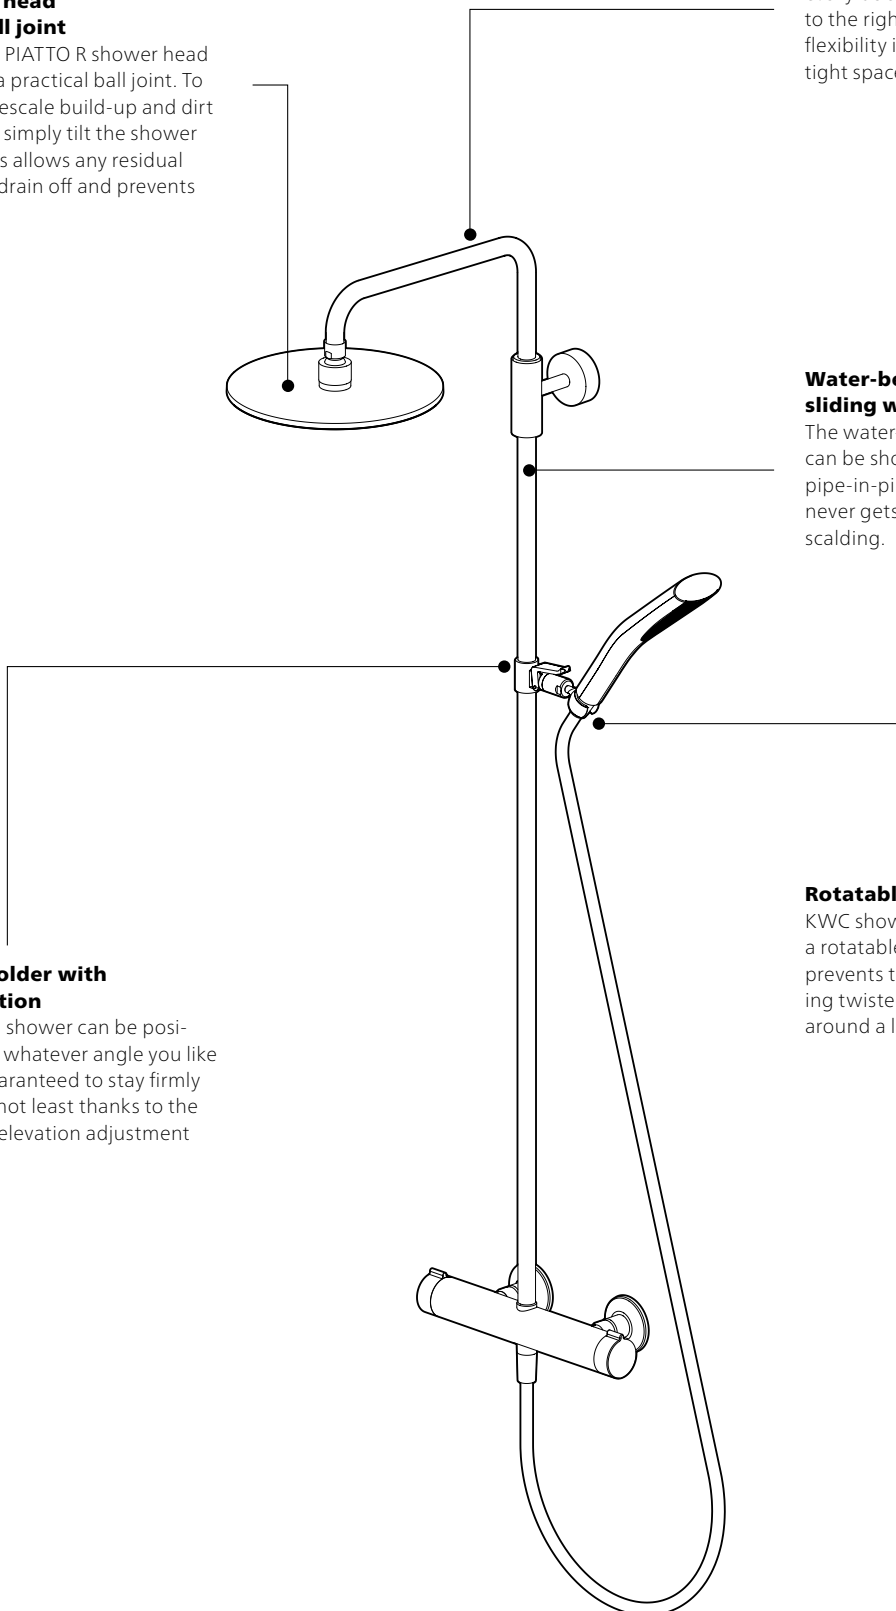

**Basin**

Lever mixer
– Fixed spout

12.151.042.000FL all chrome
A 125, with pop-up valve
12.151.052.000FL all chrome
A 125, without pop-up valve


Flow rate 7,5 l/min (3 bar)

**Basin**

Lever mixer
– For top-mounted basins
– Fixed spout

12.151.393.000FL all chrome
A 155, with pop-up valve
12.151.093.000FL all chrome
A 155, without pop-up valve

Flow rate 7,5 l/min (3 bar)

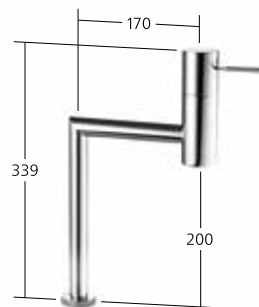**Basin**

Lever mixer
– For top-mounted basins
– Fixed spout

12.151.293.000FL all chrome
A 170, without pop-up valve

Flow rate 7 l/min (3 bar)

**Basin with LED-technology**

Lever mixer
– lightpin with real time temperature indicator (color lightpin)
– Fixed spout

12.151.342.000FL all chrome
A 125, with pop-up valve, mains receiver
12.151.332.000FL all chrome
A 125, without pop-up valve, mains receiver


Flow rate 7,5 l/min (3 bar)

**Basin Automatic, low-contact, with LED-technology**

Automatic
– touch light
– Fixed spout

12.151.432.000FL all chrome
A 125, with pop-up valve, battery
12.151.402.000FL all chrome
A 125, without pop-up valve, battery
12.151.442.000FL all chrome
A 125, with pop-up valve, mains receiver
12.151.412.000FL all chrome
A 125, without pop-up valve, mains receiver
12.151.452.000FL all chrome
A 125, with pop-up valve, power supply for concealed installation
12.151.422.000FL all chrome
A 125, without pop-up valve, power supply for concealed installation

Flow rate 5 l/min (3 bar)

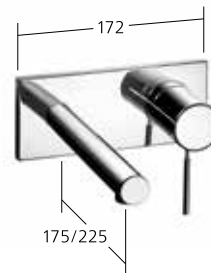
**Basin**

Lever mixer
– Fixed spout

11.152.033.000 all chrome
A 175, concealed
11.152.034.000 all chrome
A 225, concealed

To be ordered separately:
Unit for concealed installation ½"
39.151.400.931
Trim kit **Z.536.828**


Flow rate 7,5 l/min (3 bar)

**Bidet**

Lever mixer
– Fixed spout
– ball joint aerator Neoperl® Caché®

13.151.041.000FL all chrome
A 115, with pop-up valve

Flow rate 11 l/min (3 bar)

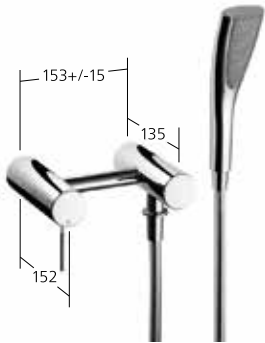


Tub

Lever mixer
 – Diverter with automatic reset
 – Rotatable spout 60°

20.152.422.000 all chrome
 AD 153 +/- 15 mm, A 135, with hand shower and hose
20.152.442.000 all chrome
 AD 153 +/- 15 mm, A 135, without hand shower and hose

Flow rate 20 l/min (3 bar)

Spray outlet:
 Flow rate 17 l/min (3 bar)

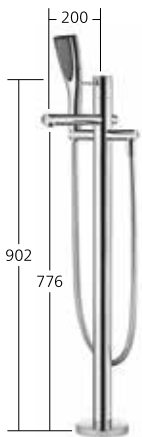

Tub


Lever mixer
 – Fixed spout

20.151.094.000 all chrome
 A 200, with hand shower and hose

To be ordered separately:
 Pre-assembly unit **Z.536.178**

Flow rate 25 l/min (3 bar)

Spray outlet:
 Flow rate 12 l/min (3 bar)

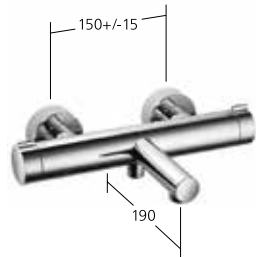


Tub

Thermostatic mixer
 – smartcontrol – water-saving device
 – touchcontrol – the body of the mixer does not become hot
 – hotcontrol – temperature handle with safety stop button 38° C
 – Fixed spout

20.152.503.000 all chrome
 AD 150 +/- 15 mm, A 190, without hand shower and hose

Flow rate 21 l/min (3 bar)

Spray outlet:
 Flow rate 14 l/min (3 bar)



Accessories

Bathtub spout
 – Fixed spout

26.151.073.000 all chrome
 A 200

Flow rate 27 l/min (3 bar)



Tub

Trim kit with function unit
 – Diverter with automatic reset
 – Outflow top and below

20.154.280.000 all chrome
20.154.290.000 all chrome
 with vacuum breaker
 DIN EN 1717

To be ordered separately:
 Unit for concealed installation
 KWC VAROX 1/2" **39.999.300.931**,
 with shut-off valves

Flow rate 21 l/min (3 bar)



Tub

Trim kit with thermostatic function unit
 – hotcontrol – temperature handle with safety stop button 38° C
 – Diverter with automatic reset
 – Outflow top and below

20.154.480.000 all chrome

To be ordered separately:
 Unit for concealed installation
 KWC VAROX 1/2" **39.999.300.931**, with
 shut-off valves


Flow rate 21 l/min (3 bar)



Accessories

Hose connection
 – Intrinsicly safe against backflow
 – Connecting thread 1/2"

26.000.610.000 all chrome

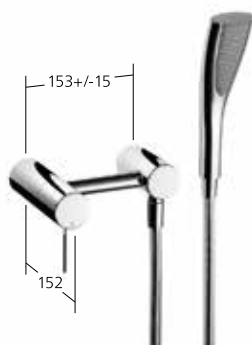**Shower**


Lever mixer

21.152.030.000 all chrome
AD 153 +/- 15 mm, with hand shower
and hose

21.152.330.000 all chrome
AD 153 +/- 15 mm, without hand shower
and hose

Spray outlet:

Flow rate 17 l/min (3 bar)

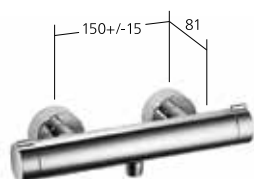**Shower**

Thermostatic mixer

- smartcontrol – water-saving device
- touchcontrol – the body of the mixer
does not become hot
- hotcontrol – temperature handle with
safety stop button 38° C

21.152.500.000 all chrome
AD 150 +/- 15 mm, without hand shower
and hose

Spray outlet:

Flow rate 14 l/min (3 bar)

**Shower**Trim kit with function unit
– Outflow top or below**21.154.280.000** all chrome

To be ordered separately:
Unit for concealed installation
KWC VAROX 1/2" **39.999.300.931**,
with shut-off valves

Flow rate 21 l/min (3 bar)

**Shower**Trim kit with thermostatic function unit
– hotcontrol – temperature handle with
safety stop button 38° C
– Outflow top or below**21.154.480.000** all chrome

To be ordered separately:
Unit for concealed installation
KWC VAROX 1/2" **39.999.300.931**,
with shut-off valves

Flow rate 21 l/min (3 bar)

**Shower system**

Thermostatic mixer

- smartcontrol – water-saving device
- touchcontrol – the body of the mixer
does not become hot
- hotcontrol – temperature handle with
safety stop button 38° C
- Sliding wall bar can be shortened to a
specific length as required

26.156.213.000 all chrome
AD 150 +/- 15 mm, with hand shower
and hose

Spray outlet:

Flow rate 12 l/min (3 bar)

**Shower**

Trim kit for thermostatic valve

- Without diverter
- Without volume control
- hotcontrol – temperature handle with
safety stop button 38° C

21.154.240.000 all chrome

To be ordered separately:
Unit for concealed installation 3/4" **39.152.320.000**


**Accessories**

Trim kit

- for shut-off valve
- for multiport shut-off valve

27.150.050.000 all chrome

To be ordered separately:
Unit for concealed installation
39.990.011.931 1/2" or
K.38.93.00.931.34 1/2",
39.990.010.931 3/4" or
K.38.H3.70.931A35 3/4"

**Accessories**Shower bracket
– non-adjustable**26.000.621.000** all chrome

A technological masterpiece



KWC ONO touch light PRO makes every important element seem simple, leaving you to focus on the essential issues in the kitchen and bathroom. This clever faucet takes the benefits offered by the electronically operated KWC ONO and enhances them with a touch of sophistication and an even greater dose of technological intelligence.

More information can be found in the «KWC ONO touch light PRO» brochure and at www.kwc.com.



Pure perfection





KWC ONO appeals to your appreciation for all things practical – and to your sophistication. That is why this simple faucet for the bathroom and kitchen is not only designed to be extra robust, but also has an exceptionally fine finish. KWC ONO ably assists you with its intelligent functions, yet it is always the perfect picture of elegance.

**High-tech and highly flexible**

The innovative highflex® spring hose opens your kitchen door to the future. This hose, designed as a sweeping curve, can be moved in any direction, returns to its original position automatically and stays firmly in place when it is not being used – even without a spray holder.

Sure and steady

When you press the lever on the KWC ONO highflex® spray head, the integrated vacuum diversion switches from the Neoperl® spray of the aerator to the needle spray of the spray head.



Perfect precision



Direct and precise

The KWC ONO operating level is made of the kind of unbreakable, corrosion-resistant stainless steel you would normally find in medical technology. This means that you can count on perfect precision when you use it.

One way or another

Just one press of the diverter button on the shower head is all it takes to switch from a full Neoperl® spray to a fine needle spray.






Intelligent versatility




This pull-out aerator has both brains and style. It can extend up to 70 cm if you pull it out, but otherwise retires politely and seamlessly back into the spout.

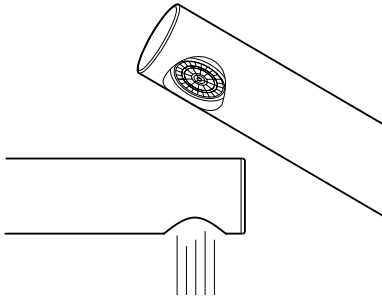


Neoperl® Caché®

The Neoperl® Caché® is integrated in the spout and adds an elegant touch to the overall look.

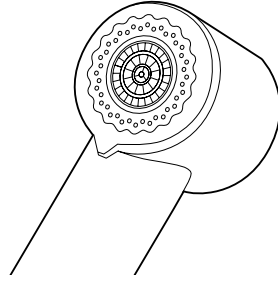

jetclean

The jetclean faceplate prevents limescale from building up on your kitchen spray and does some of your cleaning work for you. When water is flowing, the cone-shaped holes on the faceplate expand, dislodging any limescale deposits. The holes go back to their normal size when the water flow is switched off.

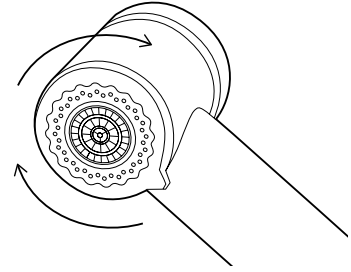

turn and clean (tac)

If limescale deposits build up on the faceplate of your faucet, the turn and clean fastening mechanism will come to your aid: simply turn, clean and the job is done.



KWC ONO touch light PRO is also available for kitchens. Further information can be found in the KWC ONO touch light PRO brochure and at www.kwc.com.





Lever mixer
– Swivel spout 270°

10.151.023.000FL all chrome
A 225
10.151.023.700FL stainless steel
A 225

Flow rate 12 l/min (3 bar)



Lever mixer
– Surgical-grade hardened stainless steel lever
– Pull-out aerator
– up to 700 mm pull-out length
– hose surface to fit faucet surface
– Hose guide, swivelling 105°

10.151.113.000FL all chrome
A 225
10.151.113.700FL stainless steel
A 225


Flow rate 10 l/min (3 bar)



Lever mixer
– Surgical-grade hardened stainless steel lever
– Pull-out spray with KWC jetclean
– up to 700 mm pull-out length
– automatic diverter reset
– hose surface to fit faucet surface
– Hose guide, swivelling 105°

10.151.033.000FL all chrome
A 220
10.151.033.700FL stainless steel
A 220

Flow rate normal spray 12 l/min (3 bar)
Flow rate needle spray 13 l/min (3 bar)




Lever mixer
– Fixed spout

11.152.033.000 all chrome
A 175, concealed
11.152.034.000 all chrome
A 225, concealed

To be ordered separately:
Unit for concealed installation 1/2"
39.151.400.931
Trim kit **Z.536.828**


Flow rate 7,5 l/min (3 bar)



Lever mixer
– Lever installation possible on the right or left side
– Swivel spout 360°

10.151.413.000FL all chrome
A 220
10.151.413.700FL stainless steel
A 220


Flow rate 11 l/min (3 bar)

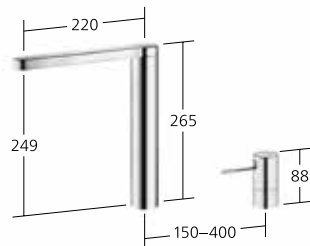

Lever mixer
– 2-hole
– Swivel spout 360°

10.152.413.000FL all chrome
A 220

Flow rate 12 l/min (3 bar)

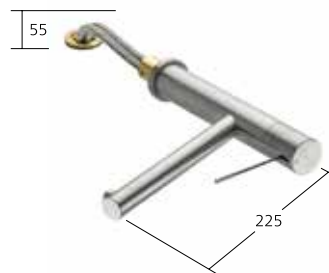

Lever mixer
– Detachable for installation below windows – detached 55 mm
– Swivel spout 270°

10.151.043.700FL stainless steel
A 225

Flow rate 11 l/min (3 bar)



Lever mixer
– Detachable for installation below windows – detached 55 mm
– Surgical-grade hardened stainless steel lever
– Intrinsically safe against backflow
– Pull-out spray with KWC jetclean
– up to 700 mm pull-out length
– hose surface to fit faucet surface
– Hose guide, swivelling 105°

10.151.053.700FL stainless steel
A 220


Flow rate normal spray 9 l/min (3 bar)
Flow rate needle spray 9 l/min (3 bar)



Lever mixer
 – Lever installation possible on the right or left side
 – Swivel spout 360°

10.151.013.000FL all chrome
 A 225

Flow rate 12 l/min (3 bar)

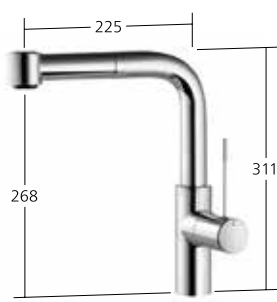

Lever mixer
 – Lever installation possible on the right or left side
 – Pull-out spray with KWC jetclean
 – up to 700 mm pull-out length
 – automatic diverter reset
 – hose surface to fit faucet surface
 – Hose guide, swivelling 360°

10.151.003.000FL all chrome
 A 225


Flow rate normal spray 12 l/min (3 bar)
 Flow rate needle spray 13 l/min (3 bar)



Lever mixer
 – Lever installation possible on the right or left side
 – Pull-out aerator covered
 – up to 700 mm pull-out length
 – hose surface to fit faucet surface
 – Hose guide, swivelling 360°

10.151.102.000FL all chrome
 A 200
10.151.102.700FL stainless steel
 A 200


Flow rate 10 l/min (3 bar)

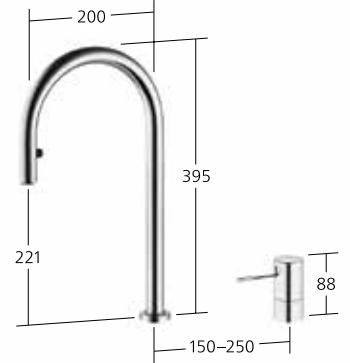

Lever mixer
 – 2-hole
 – Pull-out aerator covered
 – hose surface to fit faucet surface
 – Hose guide, swivelling 360°

10.152.322.000FL all chrome
 A 200


Flow rate 10 l/min (3 bar)

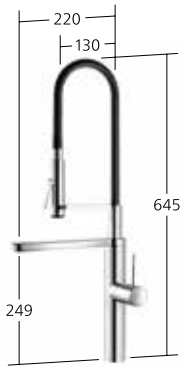

Lever mixer
 – highflex® patented spring hose technology
 – Lever installation possible on the right or left side
 – Swivel spout 360°
 – Professional spray 360° turn

10.151.423.000FL all chrome
 A 220
10.151.423.700FL stainless steel
 A 220


Flow rate 10 l/min (3 bar)
 Spray: Flow rate 3 l/min (3 bar)

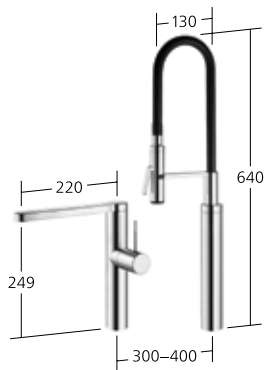

Lever mixer
 – highflex® patented spring hose technology
 – 2-hole
 – Swivel spout 360°
 – Professional spray 360° turn

10.152.423.000FL chromeline
 A 220
10.153.423.000FL chromeline
 A 220


Flow rate 8 l/min (3 bar)
 Spray: Flow rate 3 l/min (3 bar)

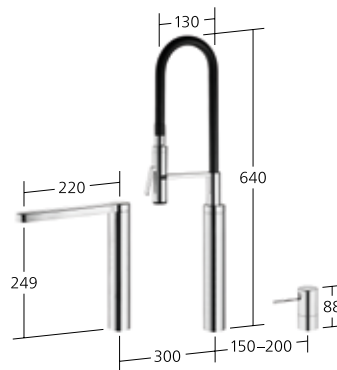

Lever mixer
 – highflex® patented spring hose technology
 – 3-hole
 – Lever installation possible on the right or left side
 – Swivel spout 360°
 – Professional spray 360° turn

10.153.423.000FL all chrome
 A 220

Flow rate 8 l/min (3 bar)
 Spray: Flow rate 3 l/min (3 bar)

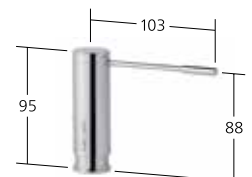

Accessories

Soap dispenser KWC ONO

Z.536.060.000 all chrome
Z.536.060.700 stainless steel

